

PARTICLE SWARM OPTIMIZATION WITH FRACTIONAL EVOLUTION

E. J. Solteiro Pires¹, J. A. Tenreiro Machado², and P. B. de Moura Oliveira¹

¹Universidade de Trás-os-Montes e Alto Douro
Vila Real, Portugal
e-mail: {epires,oliveira}@utad.pt

² Inst. Sup. de Engenharia do Porto, Instituto Politécnico do Porto
Porto, Portugal
e-mail: jtm@isep.ipp.pt

Abstract. *This work presents a new perspective of the particle swarm optimization algorithm where the integer velocity is replaced by one of fractional order. The algorithm is tested for several well known functions and the relationship between the fractional order velocity and the convergence of the algorithm is observed. The fractional order velocity is analyzed showing that influences directly the algorithm convergence rate. The fractional calculus demonstrates a potential for interpreting evolution of the algorithm and to control its convergence.*

Keywords: Fractional Calculus, Particle Swarm Optimization

1 Introduction

In the last decade particle swarming optimization (PSO) has been applied in a plethora of fields such as social modeling, computer graphics, simulation and animation of natural flocks or swarms, pattern recognition, color image quantization and computational biology [1]. PSO has seduced considerable interest from the natural computing research, where important work has been enforced in the study of its convergence.

Fractional Calculus (FC) is a natural extension of the classical mathematics. In fact, since the beginning of theory of differential and integral calculus, several mathematicians investigated the calculation of noninteger order derivatives and integrals. Nevertheless, the application of FC has been scarce until recently, but the recent scientific advances motivated a renewed interest in this field.

Bearing these ideas in mind, this work uses a fractional derivative to control the convergence rate of the PSO. The article is organized as follows. Section 2 introduces the FC. Section 3 presents the PSO and its working principles. Based on this formulation, section 4 generalizes the PSO to a fractional order. Section 5 presents the results for the PSO with fractional velocity. Finally, section 6 outlines the main conclusions.

2 Introduction to Fractional Calculus

FC goes back to the beginning of the theory of differential calculus. Nevertheless, the application of FC just emerged in the last two decades, due to the progresses in the area of nonlinear and complex systems that revealed subtle relationships with the FC concepts. In the field of dynamical systems theory some work has been carried out, but the proposed models and algorithms are still in a preliminary stage of establishment.

The fundamentals aspects of FC theory are addressed in [2, 3, 4, 5]. Concerning FC applications research efforts can be mentioned in the area of viscoelasticity, chaos, fractals, biology, electronics, signal processing, diffusion, wave propagation, percolation, modeling, control and irreversibility [6, 7, 8, 9, 10].

FC is a branch of mathematical analysis that extends to real or even complex numbers the order of the differential and integral operators. Since its foundation, the generalization of the concept of derivative and integral to a non-integer order α has been the subject of distinct approaches. Due to this reason there are several alternative definitions of fractional derivatives. For example, the Laplace definition of a derivative of fractional order $\alpha \in \mathbb{C}$ of the signal $x(t)$, $D^\alpha[x(t)]$, is a ‘direct’ generalization of the classical integer-order scheme yielding, for zero initial conditions:

$$\mathcal{L}\{D^\alpha[x(t)]\} = s^\alpha X(s) \quad (1)$$

where s is the Laplace transform variable. This means that frequency-based analysis methods have a straightforward adaptation. An alternative approach, based on the concept of fractional differential, is the Grünwald-Letnikov definition given by the equation:

$$D^\alpha [x(t)] = \lim_{h \rightarrow 0} \left[\frac{1}{h^\alpha} \sum_{k=0}^{+\infty} \frac{(-1)^k \Gamma(\alpha + 1) x(t - kh)}{\Gamma(k + 1) \Gamma(\alpha - k + 1)} \right] \quad (2)$$

where $\Gamma()$ is the Euler function.

An important property revealed by expression (2) is that while an integer-order derivative just implies a finite series, the fractional-order derivative requires an infinite number of terms. Therefore, integer derivatives are ‘local’ operators in opposition with fractional derivatives which have, implicitly, a ‘memory’ of all past events.

Often, in discrete time implementations expression (2) is approximated by:

$$D^\alpha [x(t)] = \frac{1}{T^\alpha} \sum_{k=0}^r \frac{(-1)^k \Gamma(\alpha + 1) x(t - kT)}{\Gamma(k + 1) \Gamma(\alpha - k + 1)} \quad (3)$$

where T is the sampling period and r is the truncation order.

The characteristics revealed by fractional-order models make this mathematical tool well suited to describe phenomena such as irreversibility and chaos because of its inherent memory property. In this line of thought, the propagation of perturbations and the appearance of long-term dynamic phenomena in a population of individuals subjected to an evolutionary process configure a case where FC tools fit adequately [11].

3 Particle Swarm Optimization Algorithm

Evolutionary algorithms have been successfully applied to solve many complex optimization engineering problems. Together with genetic algorithms, the PSO algorithm, proposed by

Kennedy and Eberhart [12], has achieved considerable success in solving optimization problems.

The PSO algorithm was proposed originally in [12]. This optimization technique is inspired in the way swarms behave and its elements move in a synchronized way, both as a defensive tactic and for searching food. An analogy is established between a particle and a swarm element. The particle movement is characterized by two vectors, representing its current position x and velocity v . Since 1995, many techniques were proposed to refine and/or complement the original canonical PSO algorithm, namely by analyzing the tuning parameters [13] and by considering hybridization with other evolutionary techniques [14].

In literature, some work embedding FC and PSO algorithms can be found. Pires *et al.* [15] studies the fractional dynamics during the evolution of a PSO. Reis *et al.* [16] proposes a PSO, for logic and circuit design, where is implemented a proportional-derivative fitness function to guide the optimization.

Algorithm 1 illustrates a standard PSO algorithm. The basic algorithm begins by initializing the swarm randomly in the search space. As it can be seen in the pseudo-code, were t and $t + 1$ represent two consecutive iterations, the position x of each particle is updated during the iterations by adding a new velocity v . This velocity is evaluated by summing an increment to the previous velocity value. The increment is a function of two components representing the cognitive and the social knowledge.

The cognitive knowledge of each particle is included by evaluating the difference between its best position found so far b and the current position x . On the other side, the social knowledge, of each particle, is incorporated through the difference between the best swarm global position achieved so far g and its current position x . The cognitive and the social knowledge factors are multiplied by randomly uniformly generated terms ϕ_1 and ϕ_2 , respectively.

```

Initialize Swarm;
repeat
  forall particles do
    calculate fitness  $f$ 
  end
  forall particles do
     $v_{t+1} = v_t + \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x)$ ;
     $x_{t+1} = x_t + v_{t+1}$ ;
  end
   $t = t + 1$ 
until stopping criteria ;

```

Algorithm 1: Particle swarm optimization

PSO is a optimization algorithm that proves to be efficient, robust and simple. However, if no care is taken the velocities may attain large values, particularly when particles are far away from local and global bests. Some approaches were carried out in order to eliminate this drawback. Eberhat *et al.* [17] proposed a clamping function (4) to limit the velocity, through the expression:

$$v_{ij}(t + 1) = \begin{cases} v'_{ij}(t + 1) & \text{if } v'_{ij}(t + 1) < V_{\max j} \\ V_{\max j} & \text{if } v'_{ij}(t + 1) \geq V_{\max j} \end{cases} \quad (4)$$

where $v'_{ij}(t + 1)$ results from $v'_{ij}(t + 1) = v_{ij}(t) + \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x)$ for the parameter j of particle i at iteration $t + 1$.

Later, a constant, the inertia weight, was introduced [13] to control the velocity from exploding (5). The inertia weight ω is very important to ensure convergence behavior over evolution by adopting the equation:

$$v_{t+1} = \omega \cdot v_t + \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x) \quad (5)$$

Some empirical and theoretical studies were made to determine the best inertia value [18] in order to obtain better PSO behavior.

4 Fractional Velocity

In this section a new method to control the PSO algorithm is introduced. Initially, the original velocity equation (6) is rearranged in order to modify the order of the velocity derivative, namely:

$$v_{t+1} = v_t + \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x) \quad (6)$$

This expression can be rewritten as:

$$v_{t+1} - v_t = \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x) \quad (7)$$

The left side $v_{t+1} - v_t$ is the discrete version of the derivative of order $\alpha = 1$ (assuming $T = 1$), leading to the following expression:

$$D^\alpha [v_{t+1}] = \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x) \quad (8)$$

The order of the velocity derivative can be generalized to a real number $0 \leq \alpha \leq 1$, if the FC perspective is considered, leading to a smoother variation and a longer memory effect. In order to study the behavior of this new PSO strategy, a set of simulations are carried on testing values of α ranging from $\alpha = 0$ up to $\alpha = 1$, with increments of $\Delta\alpha = 0.1$. Therefore, equation (8) can be written as (9) considering the first $r = 4$ terms of differential derivative given by (3), yielding:

$$v_{t+1} - \alpha v_t - \frac{1}{2}\alpha v_{t-1} - \frac{1}{6}\alpha(1-\alpha)v_{t-2} - \frac{1}{24}\alpha(1-\alpha)(2-\alpha)v_{t-3} = \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x) \quad (9)$$

or

$$v_{t+1} = \alpha v_t + \frac{1}{2}\alpha v_{t-1} + \frac{1}{6}\alpha(1-\alpha)v_{t-2} + \frac{1}{24}\alpha(1-\alpha)(2-\alpha)v_{t-3} + \phi_1 \cdot (b - x) + \phi_2 \cdot (g - x) \quad (10)$$

Larger values of r were tested leading to results of the same type.

5 Test functions

This section introduces the optimization functions that are adopted during the tests of PSO with fractional velocity update. The objective function consists in minimizing several well known functions namely: (i) Rosenbrock's valley (also known as Banana function), (ii) Drop wave, (iii) Easom and (iv) Michalewicz's represented in expressions (11-14), respectively [18]:

(i) *Rosenbrock's valley function*:

$$f_1(x) = \sum_{j=1}^{n-1} 100(x_{j+1} - x_j^2)^2 \quad (11)$$

with $x_i \in [-2.048, 2.048]$, $i = \{1, \dots, 4\}$ and $f^*(x) = 0.0$.

(ii) *Drop wave function*:

$$f_2(x) = -\frac{1 + \cos\left(12\sqrt{x_1^2 + x_2^2}\right)}{0.5(x_1^2 + x_2^2) + 2} \quad (12)$$

with $x_i \in [-10, 10]$, $i = \{1, 2\}$ and $f^*(x) = -1.0$.

(iii) *Easom function*:

$$f_3(x) = -\cos(x_1) \cos(x_2) e^{-(x_1 - \pi)^2 - (x_2 - \pi)^2} \quad (13)$$

with $x_1, x_2 \in [-100, 100]$ and $f^*(x) = -1.0$.

(iv) *Michalewicz's function*:

$$f_4(x) = \sum_{j=1}^n -\sin(x_j) \left[\sin \frac{(j+1)x_j^2}{\pi} \right]^{2m} \quad (14)$$

with $n = 2$, $m = 1$, $x_i \in [0, \pi]$, $i = \{1, 2\}$ and $f^*(x) = -1.84$.

These functions have n parameters, $i = \{1, \dots, n\}$ and their global optimum value is f^* . The algorithm adopts a real encoding scheme.

6 Simulation results

To study the influence of the fractional velocity in the algorithm, several tests are now developed. A 10–population size PSO is executed during a period of 200 iterations with $\{\phi_1, \phi_2\} \sim U[0, 1]$, where U is a function that generates numbers with a uniform distribution in range the specified range. The fitness evolution of the best global particle is taken as the system output.

Since PSO is a stochastic algorithm, every time it is executed it leads to a different trajectory convergence. Therefore, a test group of 201 simulation was considered, and the median was taken as the final output, for each value in the set $\alpha = \{0, 0.1, \dots, 1\}$. In figures 1-4 it can be seen the results for the adopted optimization functions f_j , $j = \{1, \dots, 4\}$.

From the figures it can be verified that the convergence of the algorithm depends directly upon the fractional order α . With exception of the Easom function, as α value increases the PSO convergence decreases.

From examples (i), (ii) and (iv), the faster convergence is achieved with $\alpha = 0$, which leads to a result equivalent to expression (5) with zero inertia weight. This weight is responsible for specifying the importance between the global exploration and the local exploitation abilities of the algorithm. With low values of α the exploitation has more importance. The search space may not be adequately explored and, therefore, the probability that the population can be trapped in a local optimum becomes higher. This phenomenon can be illustrated in examples (i) and (iv) (figures 1 and 4), where the experiment with $\alpha = 0$ starts with a good convergence, but the algorithm can not find so good values as the rest of cases for other α values. For the Easom function, the faster convergence is obtained when $\alpha = 0.3$. As the α differs from this value the convergence gets slower. In both cases, the convergence varies in a consistent form.

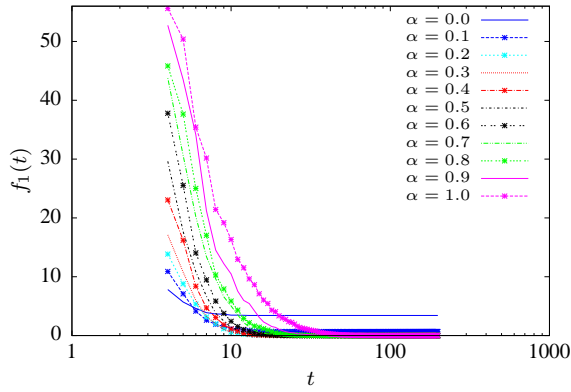


Figure 1: Evolution of the Rosenbrock's function for $\alpha = \{0, \dots, 1\}$

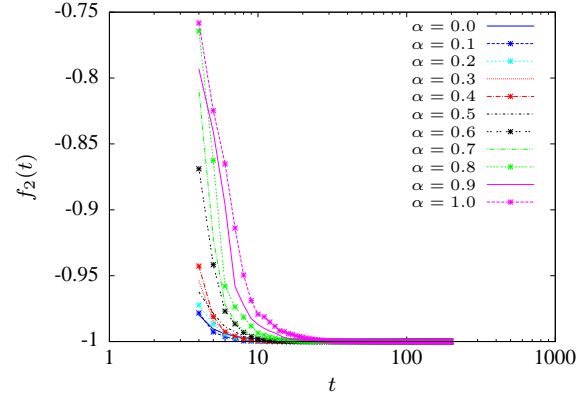


Figure 2: Evolution of the Drop wave function for $\alpha = \{0, \dots, 1\}$

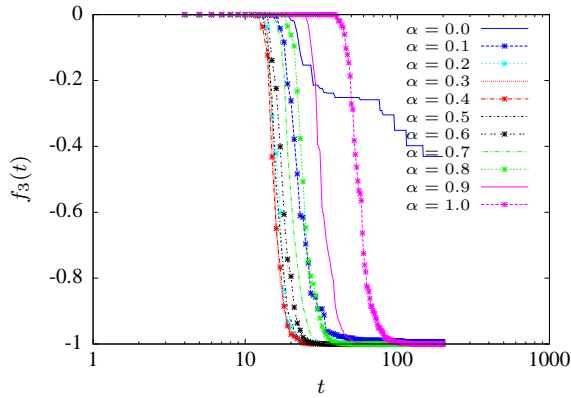


Figure 3: Evolution of the Easom function for $\alpha = \{0, \dots, 1\}$

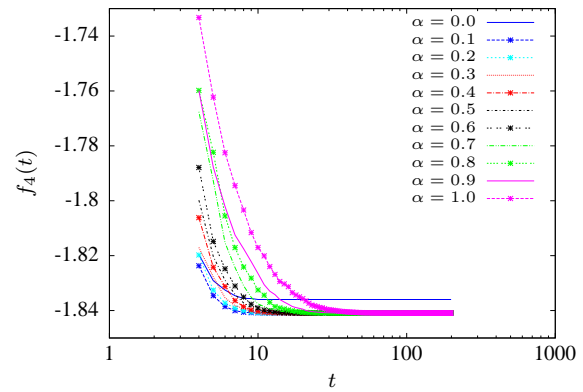


Figure 4: Evolution of the Michalewicz's function for $\alpha = \{0, \dots, 1\}$

7 Conclusions

FC is a well-developed mathematical tool which permits to understand the local and global velocity characteristics of the PSO behavior.

The fractional order velocity was analyzed showing that influences directly the algorithm convergence. Moreover, the results are consistent representing an important step to understand the relationship between velocity memory and the convergence behavior.

The FC concepts open new perspectives towards the development of more efficient evolutionary algorithms.

REFERENCES

- [1] Banks, A., Vincent, J., Anyakoha, C.: A review of particle swarm optimization. ii: Hybridisation, combinatorial, multicriteria and constrained optimization, and indicative applications. *Natural Computing* **7**(1) (2008) 109–124
- [2] Gement, A.: On fractional differentials. *Proc. Philosophical Magazine* **25** (1938) 540–549
- [3] Oustaloup, A.: *La Commande CRONE: Commande Robuste d'Ordre Non Intier*. Hermes (1991)

- [4] Méhauté, A.L.: *Fractal Geometries: Theory and Applications*. Penton Press (1991)
- [5] Podlubny, I.: *Fractional Differential Equations*. Academic Press, San Diego (1999)
- [6] Tenreiro Machado, J.A.: Analysis and design of fractional-order digital control systems. *Journal System Analysis-Modelling-Simulation* **27** (1997) 107–122
- [7] Tenreiro Machado, J.A.: System modeling and control through fractional-order algorithms. *FCAA – J. of Fractional Calculus & Ap. Analysis* **4** (2001) 47–66
- [8] Vinagre, B.M., Petras, I., Podlubny, I., Chen, Y.Q.: Using fractional order adjustment rules and fractional order reference models in model-reference adaptive control. *Nonlinear Dynamics* **1-4**(29) (July 2002) 269–279
- [9] Torvik, P.J., Bagley, R.L.: On the appearance of the fractional derivative in the behaviour of real materials. *ASME Journal of Applied Mechanics* **51** (June 1984) 294–298
- [10] Westerlund, S.: *Dead Matter Has Memory! Causal Consulting*. Kalmar, Sweden (2002)
- [11] Solteiro Pires, E.J., de Moura Oliveira, P.B., Tenreiro Machado, J.A., Jesus, I.S.: Fractional order dynamics in a particle swarm optimization algorithm. In: *Seventh International Conference on Intelligent Systems Design and Applications, ISDA 2007*, Washington, DC, USA, IEEE Computer Society (Oct. 2007) 703–710
- [12] Kennedy, J., Eberhart, R.C.: Particle swarm optimization. In: *Proceedings of the 1995 IEEE International Conference on Neural Networks*. Volume 4., Perth, Australia, IEEE Service Center, Piscataway, NJ (1995) 1942–1948
- [13] Shi, Y., Eberhart, R.: A modified particle swarm optimizer. In: *Evolutionary Computation Proceedings, 1998. IEEE World Congress on Computational Intelligence.*, The 1998 IEEE International Conference on. (1998) 69–73
- [14] Løvbjerg, M., Rasmussen, T.K., Krink, T.: Hybrid particle swarm optimiser with breeding and subpopulations. In Spector, L., Goodman, E.D., Wu, A., Langdon, W., Voigt, H.M., Gen, M., Sen, S., Dorigo, M., Pezeshk, S., Garzon, M.H., Burke, E., eds.: *Proceedings of the Genetic and Evolutionary Computation Conference (GECCO-2001)*, San Francisco, California, USA, Morgan Kaufmann (7-11 July 2001) 469–476
- [15] Solteiro Pires, E.J., Tenreiro Machado, J.A., de Moura Oliveira, P.B., Reis, C.: Fractional dynamics in particle swarm optimization. In: *ISIC. IEEE International Conference on Systems, Man and Cybernetics, 2007*, Montreal, Que. (7-10 Oct. 2007) 1958 – 1962
- [16] Reis, C., Machado, J., Galhano, A., Cunha, J.: Circuit synthesis using particle swarm optimization. (Aug. 2006) 1–6
- [17] Eberhart, R., Simpson, P., Dobbins, R.: *Computational Intelligence PC Tools*. Academic Press Professional, Inc., San Diego, CA, USA (1996)
- [18] den Bergh, F.V., Engelbrecht, A.P.: A study of particle swarm optimization particle trajectories. *Inf. Sci.* **176**(8) (2006) 937–971